


# tradeSELECT<sup>®</sup>

## LIGHTING

### Ambient



**Columbia**  
LIGHTING

### Downlighting



 **prescolite**

### Outdoor



**HUBBELL<sup>®</sup>**  
Outdoor Lighting

### Life Safety



**COMPASS<sup>®</sup>**  
Life Safety Products



**HUBBELL<sup>®</sup>**  
Lighting



# tradeSELECT®

Electricians appreciate simplicity, convenience and reliability, and that’s exactly what tradeSELECT® products represent.

DESIGNED FOR THE CONTRACTOR, tradeSELECT® PRODUCTS ARE A COLLECTION OF HUBBELL LIGHTING’S VALUE FOCUSED SOLUTIONS.

- **Simple**...popular no-frills designs
- **Convenient**...all tradeSELECT® products are stocked which means immediate availability
- **Reliable**...products from the trusted brands of Hubbell Lighting



Ambient Indoor



Downlights



Outdoor



Life Safety

# Table of Contents

<b>Ambient</b>	
CCL .....	4
CWP .....	4
CSL.....	5
<b>Downlighting</b>	
CDL .....	5
<b>Outdoor</b>	
SLING WALL .....	6
WGH.....	6
NRG 300.....	7
MARSHALL .....	7
PATROLMAN.....	8
VAPORTITES.....	8
LARAMIE .....	9
COLT .....	10
SLING FLOOD.....	10
ALF .....	11
<b>Life Safety</b>	
CC .....	12
CE.....	12
CCHOSQ .....	13
CEL.....	13
CWC .....	14
CCE .....	14
CEW .....	15
RME.....	15
CSR .....	15
CU2W .....	16
CJB.....	16
CU2 .....	17
CU2SQ .....	17
CUW .....	18
CSWEU2LED.....	18
CUSO .....	19
CIR.....	19
COR.....	19

\* For more warranty information see <http://www.hubbellighting.com/resources/warranty/>



Our partnerships with ENERGY STAR® and the DesignLights Consortium™ (DLC) assure our products are designated to meet and exceed industry specifications. Please refer to the DLC website for specific product qualifications at [www.designlights.org](http://www.designlights.org)





# INDOOR AMBIENT DOWNLIGHTING



## CCL

### CENTER-LENS TROFFER

The CCL is an efficient LED troffer with architectural style and appearance.

- 2'x2' and 2'x4' available
- 3300 and 5000 nominal lumens
- 3500K or 4000K CCT
- Recessed mount
- IC rated

Catalog Number	Description
CCL22-3335	2x2 Center-Lens Troffer, 3500K, 3300 lumens
CCL22-3340	2x2 Center-Lens Troffer, 4000K, 3300 lumens
CCL24-5035	2x4 Center-Lens Troffer, 3500K, 5000 lumens
CCL24-5040	2x4 Center-Lens Troffer, 4000K, 5000 lumens



## CWP

### WRAP LUMINAIRE

The CWP is an LED wrap fixture that provides an efficient solution for exceptional light distribution in general areas.

- Available in 4' length
- 4000 nominal lumens
- 3500K or 4000K CCT
- Sturdy acrylic lens

Catalog Number	Description
CWP4-4035	4' wrap luminaire, 3500K, 4000 lumens
CWP4-4040	4' wrap luminaire, 4000K, 4000 lumens




## CSL

### LENSED STRIPLIGHT

The CSL is an attractive narrow striplight with LED technology and a wide range of applications.

- 4' and 8' lengths
- 4000 and 8000 nominal lumens
- 3500K or 4000K CCT
- Surface mount on wall or ceiling

Catalog Number	Description
CSL4-4035	4' lensed striplight, 3500K, 4000 lumens
CSL4-4040	4' lensed striplight, 4000K, 4000 lumens
CSL8-8035	8' lensed striplight, 3500K, 8000 lumens
CSL8-8040	8' lensed striplight, 4000K, 8000 lumens



## CDL

### RECESSED DOWNLIGHT

The CDL is a recessed downlight designed for new construction or retrofit applications.

- Two models available to fit 4", 5", and 6" housings
- Highly reflective matte white finish
- 3000K CCT
- 120V
- 90 CRI

Catalog Number	Description
CDL4-7L30KA WH	4" Downlight, 3000K, 700 lumens, White
CDL6-8L30KA WH	5" or 6" Downlight, 3000K, 800 lumens, White







SLING

PERIMETER WALLPACK/FLOODLIGHT

Low profile wallpack/floodlight available in two sizes for versatile applications including: building entrances, schools, apartment buildings, institutions, loading docks, stairways and general area lighting.

\*Must order Floodlight mount kit for floodlight applications

Catalog Number	Description
SG1-20-PCU	Wallpack, 21W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 2000 lumens, 100 watt HID equivalent, Bronze
SG1-20-4K-PCU	Wallpack, 21W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 2000 lumens, 100 watt HID equivalent, Bronze
SG1-30-PCU	Wallpack, 29W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 3000 lumens, 150 watt HID equivalent, Bronze
SG1-30-4K-PCU	Wallpack, 29W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 3000 lumens, 150 watt HID equivalent, Bronze
SG2-50-PCU	Wallpack, 51W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 5000 lumens, 175 watt HID equivalent, Bronze
SG2-50-4K-PCU	Wallpack, 51W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 5000 lumens, 175 watt HID equivalent, Bronze
SG2-80-PCU	Wallpack, 80W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 7700 lumens, 250 watt HID equivalent, Bronze
SG2-80-4K-PCU	Wallpack, 80W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 7700 lumens, 250 watt HID equivalent, Bronze
SG1-YOKE	SG1 Series Yoke/Floodlight mount kit
SG1-KNUCKLE	SG1 Series Knuckle/Floodlight mount kit
SG2-YOKE	S2 Series Yoke/Floodlight mount kit
SG2-KNUCKLE	SG2 Series Knuckle/Floodlight mount kit



WGH

GLASS REFLECTOR WALLPACK

Small, medium and large provides energy-efficient one-for-one replacement of existing legacy technology. Mid power LEDs offer lower glare, better uniformity, higher efficacies (up to 119 LPW) and lower thermals for longer lasting electronic components. Borosilicate glass refractor softens LED and provides uniform distribution

Catalog Number	Description
WGH-81L-4K-U-S	32W LED, 120-277V, 4000K, 2893 lumens, 175 watt HID equivalent, Bronze
WGH-81L-5K-U-S	32W LED, 120-277V, 5000K, 3302 lumens, 175 watt HID equivalent, Bronze
WGH-110L-4K-U-M	54W LED, 120-277V, 4000K, 6170 lumens, 250 watt HID equivalent, Bronze
WGH-110L-5K-U-M	54W LED, 120-277V, 5000K, 6372 lumens, 250 watt HID equivalent, Bronze
WGH-225L-4K-U-L	97W LED, 120-277V, 4000K, 11838 lumens, 400 watt HID equivalent, Bronze
WGH-225L-5K-U-L	97W LED, 120-277V, 5000K, 12134 lumens, 400 watt HID equivalent, Bronze
WGH-225L-4K-C-L	111W LED, 347-480V, 4000K, 12818 lumens, 400 watt HID equivalent, Bronze



NRG 300

POLYCARBONATE WALLPACK

Energy-efficient LED, features one-piece polycarbonate front, vandal proof construction, dark bronze architectural finish. Photocontrol available. Entry or single story perimeter lighting for safety, security and identity. Ideal for commercial buildings, shopping centers, schools, apartment complexes as well as non-supervised vandal prone applications.

Catalog Number	Description
NRG-356L-4K-U	16.5W LED, 120-277V, 4000K, 1513 lumens, 50 watt HID equivalent, Bronze
NRG-356L-4K-U-PC	16.5W LED, 120V, PC, 4000K, 1513 lumens, 50 watt HID equivalent, Bronze
NRG-356L-5K-U	16.5W LED, 120-277V, 5000K, 1532 lumens, 50 watt HID equivalent, Bronze
NRG-356L-5K-U-PC	16.5W LED, 120V, PC, 5000K, 1532 lumens, 50 watt HID equivalent, Bronze







MARSHAL®

SECURITY FLOOD

Attractive security floodlight set. Powerful LED system saves energy and maintenance over traditional lighting sources.

Catalog Number	Description
ML-2L3K-1-DB	Security floodlight set, 26.6W, 180° PIR occupancy sensor, 3000K CCT, 2100 lumens, 120V, Dark Bronze
ML-2L3K-1-WH	Security floodlight set, 26.6W, 180° PIR occupancy sensor, 3000K CCT, 2100 lumens, 120V, White
MS-DB	Occupancy sensor only, 180° with adjustable settings, Bronze
MS-WH	Occupancy sensor only, 180° with adjustable settings, White



PATROLMAN

MULTI-PURPOSE SECURITY LUMINAIRE

Rugged die-cast aluminum housing with both 2-3/8" & 1-5/8" OD mast arm mount capability as well as direct wall/surface mounting. Less refractor provides zero uplight design for environmentally friendly installations

Catalog Number	Description
DDL-9L1	24" aluminum arm mount or wall, acrylic refractor, 39W LED 120V, PC, 5000K, 3437 lumens, 100 watt HID equivalent
DDL-9LU	24" aluminum arm mount or wall, acrylic refractor, 39W LED 120V, PC, 5000K, 3437 lumens, 100 watt HID equivalent
DDL-140L1	24" aluminum arm mount or wall, 43.6W LED 120V, PC, 5000K, 5279 lumens, 175 watt HID equivalent
DDL-56L-4K-1-NA	Wall mount, 30.6W LED, 120V, PC, 4000K, 2908 lumens, 100 watt HID equivalent
ARM-DD24	24" Aluminum arm
ARM-DD30	30" Aluminum arm




VAPORTITES

WALL/PENDANT

Rugged die-cast aluminum construction, frosted globe with guard, wet location listed, energy-efficient LED vaportites for ceiling/pendant/wall mount. Use for entry, corridors, tunnels, service passages, stairwells. Gray powder paint finish. 757 lumens, 4000 CCT.

Catalog Number	Description
VBGL-1	Ceiling mount vaportite, 12W LED, 120-277V, 4100K, 757 lumens, 150 watt incandescent replacement, Platinum Silver
VWGL-1	Wall mount vaportite, 12W LED, 120-277V, 4100K, 757 lumens, 150 watt incandescent replacement, Platinum Silver







LARAMIE

EXTRA LARGE FLOODLIGHT

High output, highly efficient LED floodlight with a variety of NEMA distributions for floodlighting applications including: large area, building facades, security and signage.

Catalog Number	Description
LFX-345-4K-Y-7PR	Flood, High Output, 341W LED 120-277V, 4000K, 37,313 lumens, 1000 watt HID equivalent, Wide, Bronze
LFX-345-Y-7PR	Flood, High Output, 341W LED 120-277V, 5000K, 35,125 lumens, 1000 watt HID equivalent, Wide, Bronze



COLT

BULLET FLOODLIGHT

Versatile, compact floodlight for landscape, accent, pole, column, facade and small area illumination. Traditional 1/2" x 14 NPS threaded adjustable knuckle mounting.

Catalog Number	Description
BUL-1L-3K-U	Bullet styling, 1/2" knuckle, 21W, 120-277V, 3000K CCT, 1900 lumens, 100 watt HID equivalent, Narrow/ Medium/ Wide Beam, Bronze
BUL-1L-4K-U	Bullet styling, 1/2" knuckle, 21W, 120-277V, 4000K CCT, 1900 lumens, 100 watt HID equivalent, Narrow/ Medium/ Wide Beam, Bronze
BUL-COLOR	Colt LED flood color lens kit with five tinted color choices – Red, Blue, Green, Yellow, Magenta/Pink
TRN-DB	Trunnion adapter for 1/2" threaded

MINI BULLET FLOODLIGHT

General floodlighting, landscape lighting, paths, sidewalks and accent. Includes two mounting capabilities: 1/2" x 14 NPS threaded adjustable knuckle or 7" stake with SO cord for landscape applications

Catalog Number	Description
MBUL-13K-1	LED miniature flood, 1/2" knuckle & stake mounting (6.75" stake with 8" SO cord included), 13.2W, 120V, 3000K CCT, 1115 lumens, 50 watt HID equivalent, Wide Beam, Bronze



SLING

FLOODLIGHT/PERIMETER WALLPACK

Low profile wallpack/floodlight available in two sizes for versatile applications including: building entrances, schools, apartment buildings, institutions, loading docks, stairways and general area lighting.

\*Must order Floodlight mount kit for floodlight applications

Catalog Number	Description
SG1-20-PCU	Wallpack, 21W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 2000 lumens, 100 watt HID equivalent, Bronze
SG1-20-4K-PCU	Wallpack, 21W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 2000 lumens, 100 watt HID equivalent, Bronze
SG1-30-PCU	Wallpack, 29W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 3000 lumens, 150 watt HID equivalent, Bronze
SG1-30-4K-PCU	Wallpack, 29W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 3000 lumens, 150 watt HID equivalent, Bronze
SG2-50-PCU	Wallpack, 51W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 5000 lumens, 175 watt HID equivalent, Bronze
SG2-50-4K-PCU	Wallpack, 51W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 5000 lumens, 175 watt HID equivalent, Bronze
SG2-80-PCU	Wallpack, 80W LED, 120-277V, Incl. Photocontrol w/ Cover, 5000K, 7700 lumens, 250 watt HID equivalent, Bronze
SG2-80-4K-PCU	Wallpack, 80W LED, 120-277V, Incl. Photocontrol w/ Cover, 4000K, 7700 lumens, 250 watt HID equivalent, Bronze
SG1-YOKE	SG1 Series Yoke/Floodlight mount kit
SG1-KNUCKLE	SG1 Series Knuckle/Floodlight mount kit
SG2-YOKE	S2 Series Yoke/Floodlight mount kit
SG2-KNUCKLE	SG2 Series Knuckle/Floodlight mount kit




ALF

LINEAR LED FLOODLIGHT

Compact, wide beam, low profile LED floodlight. Cast aluminum housing, 1/2" brass knuckle mount swivel, adjustable pivot from 0-75 degrees Ideal for signs, facade, landscape accent, easily blends into landscape environment.

Catalog Number	Description
ALF-6LU-5K-BZ	Flood, Linear, 23W LED 120-277V, 5000K, 667 lumens, 70 watt HID equivalent, Wide, Bronze
ALF-12LU-5K-BZ	Flood, Linear, 11W LED 120-277V, 5000K Wide, 1395 lumens, 100 watt HID equivalent, Bronze







### CC

#### COMBINATION EXIT/UNIT

- White or Black housing made of high impact UL flame rated thermoplastic
- Molded-in template for quick installation
- Lamp-heads are fully adjustable
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed

Catalog Number	Description
CCR	White Thermoplastic, Combination Exit/Emergency Light, Universal Face, Red Letters
CCRB	Black Thermoplastic, Combination Exit/Emergency Light, Universal Face, Red Letters
CCG	White Thermoplastic, Combination Exit/Emergency Light, Universal Face, Green Letters
CCGB	Black Thermoplastic, Combination Exit/Emergency Light, Universal Face, Green Letters
CCRRC	White Thermoplastic, Combination Exit/Emergency Light, Universal Face, Red Letters, Remote Capacity
CCRRCB	Black Thermoplastic, Combination Exit/Emergency Light, Universal Face, Red Letters, Remote Capacity
CCGRC	White Thermoplastic, Combination Exit/Emergency Light, Universal Face, Green Letters, Remote Capacity

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)



### CE

#### EXIT SIGN

- Molded-in template for quick installation
- Universal single or double-face
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed

Catalog Number	Description
CAR	White Thermoplastic Exit, Universal Face, Red LED, AC Only Exit
CAG	White Thermoplastic Exit, Universal Face, Green LED, AC Only Exit
CARB	Black Thermoplastic Exit, Universal Face, Red LED, AC Only Exit
CAGB	Black Thermoplastic Exit, Universal Face, Green LED, AC Only Exit
CER	White Thermoplastic Exit, Universal Face, Red LED, Emergency Exit
CERB	Black Thermoplastic Exit, Universal Face, Red LED, Emergency Exit
CEG	White Thermoplastic Exit, Universal Face, Green LED, Emergency Exit
CEGB	Black Thermoplastic Exit, Universal Face, Green LED, Emergency Exit
CERRC	White Thermoplastic Exit, Universal Face, Red LED, Emergency Exit, Remote Capacity
CERRCB	Black Thermoplastic Exit, Universal Face, Red LED, Emergency Exit, Remote Capacity
CEGRC	White Thermoplastic Exit, Universal Face, Green LED, Emergency Exit, Remote Capacity

Note: Remote Capacity Exit will only power the Compass Indoor and Outdoor Remote (CIR and COR Series)



### CCHOSQ

#### COMBINATION EXIT/UNIT WITH SQUARE HEADS

- White or Black housing made of high impact UL flame rated thermoplastic
- Molded-in template for quick installation
- Square Heads are fully adjustable
- Remote capacity or extended run-time option
- Matching indoor or outdoor remote heads CIRS, CIRD, CORD, CORS
- Damp Location Listed

Catalog Number	Description
CCRHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Red Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp
CCGHOSQ	White Thermoplastic, Dual Square Lamp Head, Universal Exit Face, Green Letters, Damp Location Listed, 120/277VAC Input, 3.6VDC Output, 1.7W per lamp



### CEL

#### EDGE-LIT EXIT

- Brushed Aluminum Housing with Acrylic Panels
- Panel illumination with red or green letters
- Mirror divider on single and double-face models
- Low input power consumption at 3.72 Watts
- Listed to UL924 Standard

Catalog Number	Description
CELS1RNE	Surface Mount, Single Face, Red Letters, Brushed Aluminum with Battery
CELS1GNE	Surface Mount, Single Face, Green Letters, Brushed Aluminum with Battery
CELS2RNE	Surface Mount, Double Face, Red Letters, Brushed Aluminum with Battery
CELS2GNE	Surface Mount, Double Face, Green Letters, Brushed Aluminum with Battery
CELR1RNE	Recessed Mount, Single Face, Red Letters, Brushed Aluminum with Battery
CELR1GNE	Recessed Mount, Single Face, Green Letters, Brushed Aluminum with Battery
CELR2RNE	Recessed Mount, Double Face, Red Letters, Brushed Aluminum with Battery
CELR2GNE	Recessed Mount, Double Face, Green Letters, Brushed Aluminum with Battery





## CWC

### WET LOCATION EXIT/EMERGENCY LIGHT

- Exit face-plate and lamp-head shield made from high impact, UV stable polycarbonate
- LED based exit/emergency light for wall, ceiling or end mounting
- Includes Self-Test/Self-Diagnostics
- Fully adjustable LED lamp-heads at 3.6W each
- Wet Location Listed

Catalog Number	Description
<b>CWC1RW</b>	Single Face, Red Letters
<b>CWC2RW</b>	Double Face, Red Letters
<b>CWC1GW</b>	Single Face, Green Letters
<b>CWC2GW</b>	Double Face, Green Letters
<b>CWC1RW-CT</b>	Single Face, Red Letters, Cold Temperature Operation
<b>CWC2RW-CT</b>	Double Face, Red Letters, Cold Temperature Operation
<b>CWC1GW-CT</b>	Single Face, Green Letters, Cold Temperature Operation
<b>CWC2GW-CT</b>	Double Face, Green Letters, Cold Temperature Operation



## CCE

### THIN DIE-CAST EXIT

- Brushed aluminum die-cast housing with 6" letters
- Molded-in template for quick installation
- Single or double-face options
- Wall, End or Ceiling Mounted
- 24 hr re-charge
- Damp Location Listed

Catalog Number	Description
<b>CCESRE</b>	Brushed Face, Black Housing, Single-Face, Red, Emergency
<b>CCEDRE</b>	Brushed Face, Black Housing, Double-Face, Red, Emergency
<b>CCESGE</b>	Brushed Face, Black Housing, Single-Face, Green, Emergency
<b>CCEDGE</b>	Brushed Face, Black Housing, Double-Face, Green, Emergency
<b>CCESR</b>	Brushed Face, Black Housing, Single-Face, Red, AC
<b>CCEDR</b>	Brushed Face, Black Housing, Double-Face, Red, AC
<b>CCESG</b>	Brushed Face, Black Housing, Single-Face, Green, AC
<b>CCEDG</b>	Brushed Face, Black Housing, Double-Face, Green, AC



## CEW

### WET LOCATION EXIT

- Housing and face plate made from impact resistant polycarbonate
- Corrosion resistant and faceplate fully gasketed
- Can be wall end or ceiling mounted
- Wet location listed (-20°C to 50°C)
- Single or Double Face options

Catalog Number	Description
<b>CEWSRE</b>	Wet Location, Single-Face, Red, Emergency
<b>CEWDRE</b>	Wet Location, Double-Face, Red, Emergency
<b>CEWSGE</b>	Wet Location, Single-Face, Green, Emergency
<b>CEWDGE</b>	Wet Location, Double-Face, Green, Emergency

## RME



### RUNNING MAN EXIT SIGN

- International Running Man Symbol
- Durable, powder coated 20 gauge steel housing
- Includes face-plates for single or double face
- Includes long-life 4.8VDC Nickel Cadmium battery
- AC, Emergency and Self-Diagnostic models available
- Dual 120/347VAC input

Catalog Number	Description
<b>RMEUW</b>	White Housing, AC only
<b>RMEUWE</b>	White Housing, NiCad Battery
<b>RMEUWE-SD</b>	White Housing, NiCad Battery, Self-Test/Self Diagnostic

## CSR



### INTERNATIONAL SALIDA Exit

- Meets international input voltage installation
- Molded-in template for Quick Installation
- Universal single SALIDA face
- Optional long-life 4.8V Nickel Cadmium battery for 90 minute emergency lighting
- Provided with test switch and AC-On indicator

Catalog Number	Description
<b>CSRIV</b>	120/220-240VAC, 50/60Hz., Universal SALIDA Face, Red LED, AC only
<b>CSREIV</b>	120/220-240VAC, 50/60Hz., Universal SALIDA Face, Red LED Emergency, NiCad battery





## CU2W

### WET LOCATION EMERGENCY LIGHT

- Grey or Black housing
- Corrosion resistant UV stabilized polycarbonate housing
- Remote capacity or extended run-time option
- Fully adjustable lamp-heads
- Water-proof test switch and AC-On indicator
- Wet Location Listed (0°C to 50°C)

Catalog Number	Description
<b>CU2WG</b>	Dual-Head Fully Adjustable, Grey Finish
<b>CU2WB</b>	Dual-Head Fully Adjustable, Black Finish



## CJB

### COMPACT EMERGENCY/CONVENIENCE LIGHT

- Low Level or Above the door with adjustable angle options
- 4.8Vdc Nickel Metal Hydride(NIMH) Battery
- Quick installation
- Mounts in a 4" square J-box
- Passive Infra-Red(PIR) sensor option for convenient night-light operation
- Optional Passive Infra-Red (PIR) sensor for night-light

Catalog Number	Description
<b>CJBLWE</b>	Low level, white finish with battery
<b>CJBLWEP</b>	Low level, white finish, battery, PIR sensor
<b>CJBLBE</b>	Low level, black finish with battery
<b>CJBLBEP</b>	Low level, black finish, battery, PIR sensor
<b>CJBWE</b>	Adjustable angle, white finish with battery
<b>CJBWEP</b>	Adjustable angle, white finish, battery, PIR sensor
<b>CJBBE</b>	Adjustable angle, black finish with battery
<b>CJBEBP</b>	Adjustable angle, black finish, battery, PIR sensor



## CU2

### EMERGENCY LIGHT

- Injection molded, flame retardant thermoplastic housing
- Fully gasketd polycarbonate shield with integral lamp heads
- Dual voltage input 120/277VAC, 60 Hz.
- Maintenance free, sealed lead calcium battery
- UL 924 Listed for wet location

Catalog Number	Description
<b>CU2</b>	White Thermoplastic, Dual-Head LED Emergency Light
<b>CU2B</b>	Black Thermoplastic, Dual-Head LED Emergency Light
<b>CU2RC</b>	White Thermoplastic, Dual-Head LED Emergency Light, Remote Capacity
<b>CU2RCB</b>	Black Thermoplastic, Dual-Head LED Emergency Light, Remote Capacity

Note: Remote Capacity Unit will only power the Compass Indoor and Outdoor Remote(CIR and COR Series)



## CU2SQ

### EMERGENCY LIGHT WITH SQUARE HEADS

- Housing made of white or black high impact UL flame rated thermoplastic
- Wall or Ceiling Mounted
- Fully adjustable square lamp-heads
- Remote capacity or extended run-time option
- Long Life Nickel Cadmium battery
- Provided with test switch and AC-On indicator

Catalog Number	Description
<b>CU2SQ</b>	White Thermoplastic, Dual Square Head Emergency Light
<b>CU2SQB</b>	Black Thermoplastic, Dual Square Head Emergency Light
<b>CU2RCSQ</b>	White Thermoplastic, Dual Square Head Emergency Light, 2.3W of remote capacity to run CIR/COR remotes



## CUW




### OUTDOOR EMERGENCY LIGHT

- Durable die-cast aluminum housing
- Fully sealed and gasketed design
- Normally-on and emergency operation
- Includes Self-Diagnostic/Self-Test
- Photo-Control standard and Optional heater

Catalog Number	Description
CUWZ-PC	Outdoor LED AC/Emergency, 0° to 50°C, with Photo-Control, Dark Bronze Finish
CUWZ-HTR-PC	Outdoor LED AC/Emergency, -20° to 40°C, with HTR and Photo-Control, Dark Bronze Finish

## CSWEU2LED

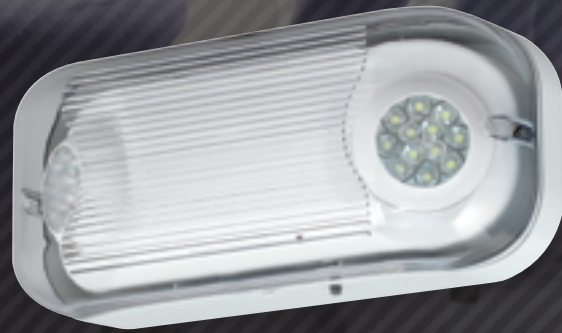

### SHIELDED WET LOCATION EMERGENCY LIGHT

- LED Life-cycle exceeding 10 years
- Quick installation
- Dual-voltage 120 or 277VAC input
- Long-life Nickel Cadmium battery at 3.6VDC for UL recognized 90 minute emergency lighting
- Wet Location Listed for 10°C to 40°C(50°F-104°F)
- External Push-to-Test switch
- Wall or Ceiling Mount

Catalog Number	Description
CSWEU2LED	Clear poly-carbonate shield with White Thermoplastic Housing, Dual LED Lamps

## CUSO



### SLIM AC/EMERGENCY OUTDOOR LIGHT

- Housing is fully sealed and gasketed, and has an IP65 rating
- Includes self-diagnostic/self-test feature to monitor proper operation
- Includes photo-sensor and Passive
- Infra-Red sensor for normally-on operation
- 0C° to 50°C Standard Model, -25°C to 50°C with optional heater

Catalog Number	Description
CUSO DB	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Dark Bronze
CUSO DB-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Dark Bronze, Heater
CUSO BK	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Black
CUSO BK-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., Black, Heater
CUSO WH	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., White
CUSO WH-H	Outdoor AC/EM, 3000K, Photo-sensor and PIR Motion Detect, Self-Diag., White, Heater
CUSO4DB-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Dark Bronze
CUSO4DB-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Dark Bronze, Heater
CUSO4BK-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Black
CUSO4BK-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., Black, Heater
CUSO4WH-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., White
CUSO4WH-H-ND	Outdoor AC/EM, 4000K, Photo-sensor, Self-Diag., White, Heater

## CIR



### INDOOR REMOTE

- Fully adjustable lamp-heads
- Single or double lamp-head remote with base-plate

Catalog Number	Description
CIRS	Single LED remote lamp-head with mounting base
CIRD	Double LED remote lamp-head with mounting base

\*Powered by the Compass Exit, Combo or Emergency Light with Remote Capacity

## COR



### OUTDOOR REMOTE

- Fully adjustable lamp-heads
- Single or double lamp-head remote with base
- Fully gasketed for application in wet environment

Catalog Number	Description
CORS	Single LED outdoor remote lamp-head with mounting base
CORD	Double LED outdoor remote lamp-head with mounting base

Powered by Compass Exit, Combo or Emergency Light with Remote Capacity





ALERA LIGHTING

ARCHITECTURAL AREA LIGHTING

BEACON PRODUCTS

COLUMBIA LIGHTING

COMPASS LIFE SAFETY PRODUCTS

DUAL-LITE

HUBBELL CONTROL SOLUTIONS

HUBBELL INDUSTRIAL LIGHTING

HUBBELL OUTDOOR LIGHTING

KIM LIGHTING

KURT VERSEN

LITECONTROL

PRESCOLITE

SECURITY LIGHTING

WHITEWAY

**Columbia**  
LIGHTING

 **prescolite**

 **COMPASS**  
LIFE SAFETY PRODUCTS

**HUBBELL**  
Outdoor Lighting

701 Millennium Blvd. Greenville, SC 29607

Tel 864.678.1000

[www.compasslightingproducts.com](http://www.compasslightingproducts.com) | [www.hubbelloutdoor.com](http://www.hubbelloutdoor.com) | [www.columbialighting.com](http://www.columbialighting.com) | [www.prescolite.com](http://www.prescolite.com)

05/17

Copyright © 2017 TradeSELECT, a division of Hubbell Lighting, Inc. All rights reserved. Please refer to online specifications for most up-to-date content as specifications are subject to change without notice.